



Dimensions of blind flanges - ASME B16.47 series A Class 150

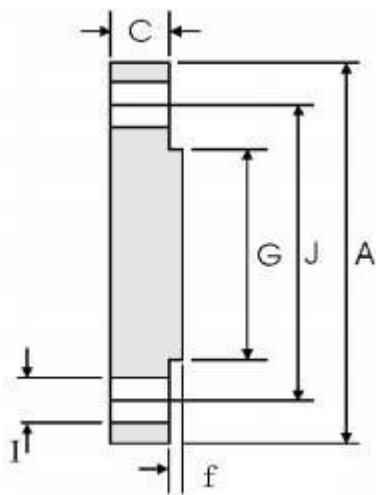

f=2mm

DN	NPS	Overall Diameter	Thickness of Flange(Min.)	Diameter of Face	Number of Bolts	Diameter of Bolt Holes	Diameter of Bolt Circle
		A	C	G	n	I	J
650	26	870	66.7	749	24	34.9	806.4
700	28	925	69.9	800	28	34.9	863.6
750	30	985	73.1	857	28	34.9	914.4
800	32	1060	79.4	914	28	41.3	977.9
850	34	1110	81.0	965	32	41.3	1028.7
900	36	1170	88.9	1022	32	41.3	1085.8
950	38	1240	85.8	1073	32	41.3	1149.4
1000	40	1290	88.9	1124	36	41.3	1200.2
1050	42	1345	95.3	1194	36	41.3	1257.3
1100	44	1405	100.1	1245	40	41.3	1314.4
1150	46	1455	101.6	1295	40	41.3	1365.2
1200	48	1510	106.4	1359	44	41.3	1422.4
1250	50	1570	109.6	1410	44	47.6	1479.6
1300	52	1625	114.3	1461	44	47.6	1536.7
1350	54	1685	119.1	1511	44	47.6	1593.8
1400	56	1745	122.3	1575	48	47.6	1651.0
1450	58	1805	127.0	1626	48	47.6	1708.2
1500	60	1855	130.2	1676	52	47.6	1759.0


Dimensions of blind flanges - ASME B16.47 series A Class 300

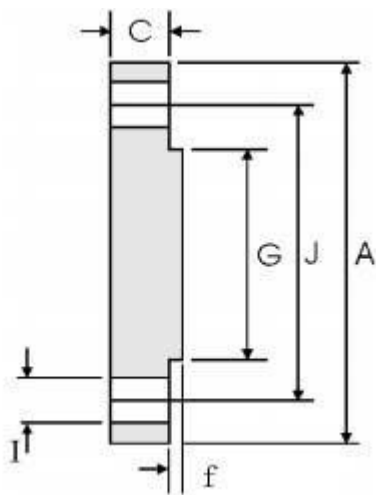

f=2mm

DN	NPS	Overall Diameter	Thickness of Flange(Min.)	Diameter of Face	Number of Bolts	Diameter of Bolt Holes	Diameter of Bolt Circle
		A	C	G	n	I	J
650	26	970	82.6	749	28	44.5	876.3
700	28	1035	88.9	800	28	44.5	939.8
750	30	1090	93.7	857	28	47.6	997.0
800	32	1150	98.5	914	28	50.8	1054.1
850	34	1205	103.2	965	28	50.8	1104.9
900	36	1270	109.6	1022	32	54.0	1168.4
950	38	1170	106.4	1029	32	41.3	1092.2
1000	40	1240	112.8	1086	32	44.5	1155.7
1050	42	1290	117.5	1137	32	44.5	1206.5
1100	44	1355	122.3	1194	32	47.6	1263.6
1150	46	1415	127.0	1245	28	50.8	1320.8
1200	48	1465	131.8	1302	32	50.8	1371.6
1250	50	1530	138.2	1359	32	54.0	1428.8
1300	52	1580	142.9	1410	32	54.0	1479.6
1350	54	1660	150.9	1467	28	60.3	1549.4
1400	56	1710	152.4	1518	28	60.3	1600.2
1450	58	1760	157.2	1575	32	60.3	1651.0
1500	60	1810	162.0	1626	32	60.3	1701.8


Dimensions of blind flanges - ASME B16.47 series A Class 400

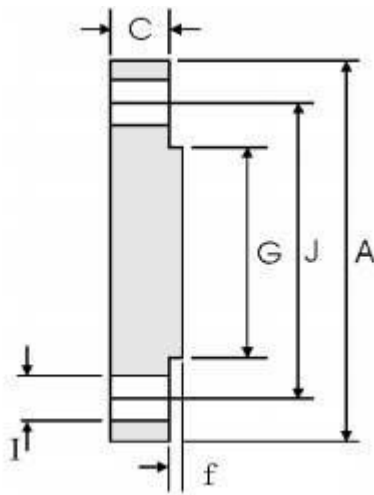

f=7mm

DN	NPS	Overall Diameter	Thickness of Flange(Min.)	Diameter of Face	Number of Bolts	Diameter of Bolt Holes	Diameter of Bolt Circle
		A	C	G	n	I	J
650	26	970	98.5	749	28	47.6	876.3
700	28	1035	104.8	800	28	50.8	939.8
750	30	1090	111.2	857	28	54.0	997.0
800	32	1150	115.9	914	28	54.0	1054.1
850	34	1205	122.3	965	28	54.0	1104.9
900	36	1270	128.6	1022	32	54.0	1168.4
950	38	1205	123.9	1035	32	47.6	1117.6
1000	40	1270	130.2	1092	32	50.8	1174.8
1050	42	1320	133.4	1143	32	50.8	1225.6
1100	44	1385	139.7	1200	32	54.0	1282.7
1150	46	1440	146.1	1257	36	54.0	1339.8
1200	48	1510	152.4	1308	28	60.3	1403.4
1250	50	1570	157.2	1362	32	60.3	1460.5
1300	52	1620	162.0	1413	32	60.3	1511.3
1350	54	1700	169.9	1470	28	66.7	1581.2
1400	56	1755	174.7	1527	32	66.7	1632.0
1450	58	1805	177.8	1578	32	66.7	1682.8
1500	60	1885	185.8	1635	32	73.0	1752.6


Dimensions of blind flanges - ASME B16.47 series A Class 600

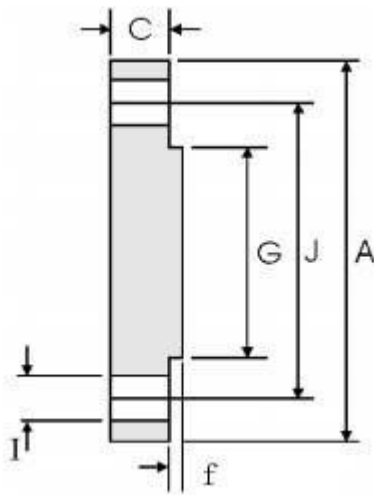

f=7mm

DN	NPS	Overall Diameter	Thickness of Flange(Min.)	Diameter of Face	Number of Bolts	Diameter of Bolt Holes	Diameter of Bolt Circle
		A	C	G	n	I	J
650	26	1015	125.5	749	28	50.8	914.4
700	28	1075	131.8	800	28	54.0	965.2
750	30	1130	139.7	857	28	54.0	1022.4
800	32	1195	147.7	914	28	60.3	1079.5
850	34	1245	154.0	965	28	60.3	1130.3
900	36	1315	162.0	1022	28	54.0	1193.8
950	38	1270	155.0	1054	28	60.3	1162.0
1000	40	1320	162.0	1111	32	60.3	1212.8
1050	42	1405	171.5	1168	28	54.0	1282.7
1100	44	1455	177.8	1226	32	54.0	1333.5
1150	46	1510	185.8	1276	32	54.0	1390.6
1200	48	1595	195.3	1334	32	73.0	1460.5
1250	50	1670	203.2	1384	28	79.4	1524.0
1300	52	1720	209.6	1435	32	79.4	1574.8
1350	54	1780	217.5	1492	32	79.4	1632.0
1400	56	1855	225.5	1543	32	85.7	1695.4
1450	58	1905	231.8	1600	32	85.7	1746.2
1500	60	1995	242.9	1657	28	92.1	1822.4

Dimensions of blind flanges - ASME B16.47 series A Class 900

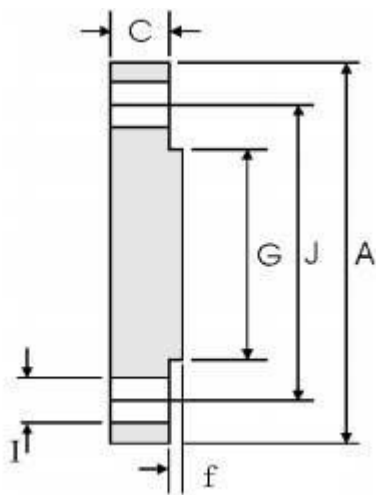

f=7mm

DN	NPS	Overall Diameter	Thickness of Flange(Min.)	Diameter of Face	Number of Bolts	Diameter of Bolt Holes	Diameter of Bolt Circle
		A	C	G	n	I	J
650	26	1085	160.4	749	20	73.0	952.5
700	28	1170	171.5	800	20	79.4	1022.4
750	30	1230	182.6	857	20	79.4	1085.8
800	32	1315	193.7	914	20	85.7	1155.7
850	34	1395	204.8	965	20	92.0	1225.6
900	36	1460	214.4	1022	20	92.0	1289.0
950	38	1460	215.9	1099	20	92.0	1289.0
1000	40	1510	223.9	1162	24	92.0	1339.8
1050	42	1560	231.8	1213	24	92.0	1390.6
1100	44	1650	242.9	1270	24	98.4	1463.7
1150	46	1735	255.6	1334	24	104.8	1536.7
1200	48	1785	263.6	1384	24	104.8	1587.5